

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Radio Models Covered:

2025 Standard PoC – Primary Focus

2025 Professional PoC

2025 Mobile Base PoC

2026 Ultra Mini PoC

The talk2me 2-way walkie-talkie radio exemplifies our state-of-the-art communication device equipped with cellular connectivity, guaranteeing that you stay connected regardless of your location. Utilizing the XIN 2-way international radio network, you can keep in touch with your team or engage in public community group(s), enabling seamless radio conversations at talk2chat.com. With talk2me, you are continuously connected.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Table of Contents

Introduction

DEVICE INTRODUCTION	3
PACKAGE CONTENTS	3
SIM CARD INFORMATION	4
POWER BUTTON	5
FRONT DISPLAY PANEL	6
FUNCTIONS OF THE RADIO	7
OPTIONS MENUS	8
GROUP MENU	8
MEMBER MENU	8
SETTINGS MENU	8-11
OPTIONAL RADIO FEATURES FOR GPS	12
RADIO FUNCTIONALITY TIPS	13
SOLVING GUIDANCE FOR PROBLEMS	13-14
TECHNICAL SPECIFICATIONS	15-18
SUPPORT	19
COMPLIANCE	19
TRADEMARKS	19
WARRANTY	19
FCC DECLARATION OF CONFORMANCE	20
FCC RF RADIATION EXPOSURE STATEMENT (SAR)	20
SAFETY WARNINGS	21
SAFETY AND COMPLIANCE	21
MAINTENANCE & CARE	22
LEGAL NOTICES	22
REPLACEMENT PARTS LIST	23-24

Network – How to use 25

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Device Introduction

The TALK2ME GLOBAL Radios can deliver Voice over Data (VOD) services to nearly any location using cellular broadband technology. With a simple press of the push-to-talk button, users can access fast, reliable, and private communication, ensuring uninterrupted connectivity for voice interactions.

Package Contents

Your package has the following items:

- **TALK2ME GLOBAL Radio Head Unit**
- 1 x Pre-Installed SIM card
- 1 x Headset or Microphone Cable (Portables Only)
- 1 x Mounting Bracket Kit (Mobiles Only)
- 1 x Cigarette Lighter cable (Mobiles Only)
- 1 x Power Adapter
- 1 x USB-C Cable (Portables Only)
- 1 x Docking Station (Portables Only except Ultra Mini)
- 1 x Lanyard
- 1 x Manual Insert

SIM Card Information

A SIM card WILL be preinstalled in the radio.

Do not remove the SIM card unless advised to do so by a support team member.

To install the SIM card:

1. Ensure that power to the radio is off.
2. Open the SIM Slot cover
3. Push the SIM into the slot.
4. The SIM should lock into place by using your finger to lock the SIM into the slot.

This device offers dual SIM capability, however if you are using one SIM card you should always use SIM card slot #1.

TALK2ME PoC Radios


Universal GLOBAL Radio Manual



Battery & Belt Clip Installation

Installing/Removing Belt Clips (Standard 25 Models)

Align the randomly configured belt clip with the back clip on the back of the battery pack and tighten it.

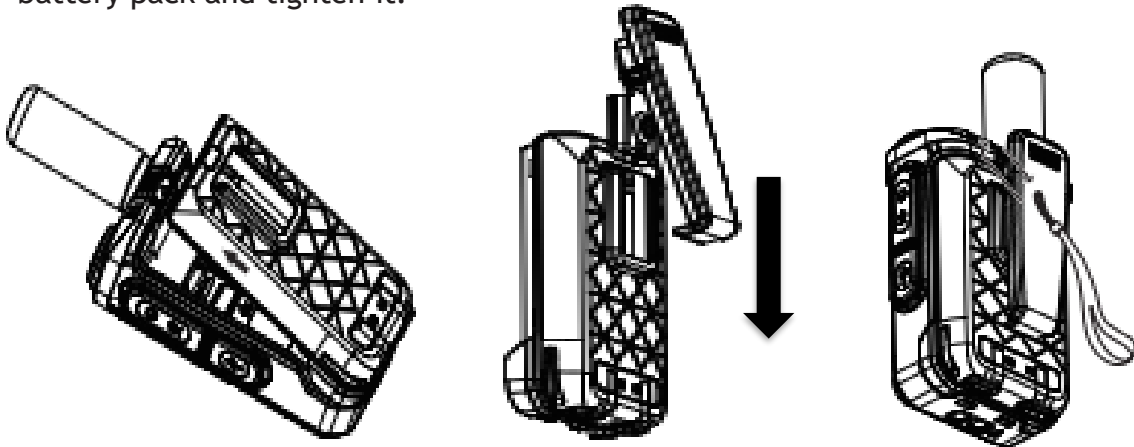

Installing/Removing Battery

Align the two grooves of the battery with the corresponding guides on the aluminum shell on the back of the walkie talkie, ensuring that the battery is in full contact and parallel to the aluminum shell.

Push the battery horizontally along the aluminum shell guide rail on the back of the walkie talkie until the battery locking buckle on the walkie talkie base is locked.

To remove the battery, please confirm that the walkie talkie is turned off and press down on the battery lock button.

Other models that have similar battery removal procedures are the 25 Professional, 26 Ultra Mini, Mobile units do have batteries.

Please see the included additional manual found in your product box for exact installation instructions for your product.



TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Power button.

Let's go over the buttons and functions that will help you get used to your new radio unit, (Standard 2025 Shown)



Power Button

Now that you know your buttons we power on the radio, all other functions will be discussed later in this manual.

Power On/Off key (Orange Side key)

- Push in and hold the Power button for 3 seconds to turn on the radio.
- Push in and hold the Power button for 3 seconds to turn off the radio.

Once the radio has powered up you will be taken to the main display screen below:

TALK2ME PoC Radios

Universal GLOBAL Radio Manual




Power button for other models.



- Push in and hold the Power button for 3 seconds to turn on the radio.
- Push in and hold the Power button for 3 seconds to turn off the radio.

Front Panel display screen.

The radio displays status information on the front panel. (From top to bottom)

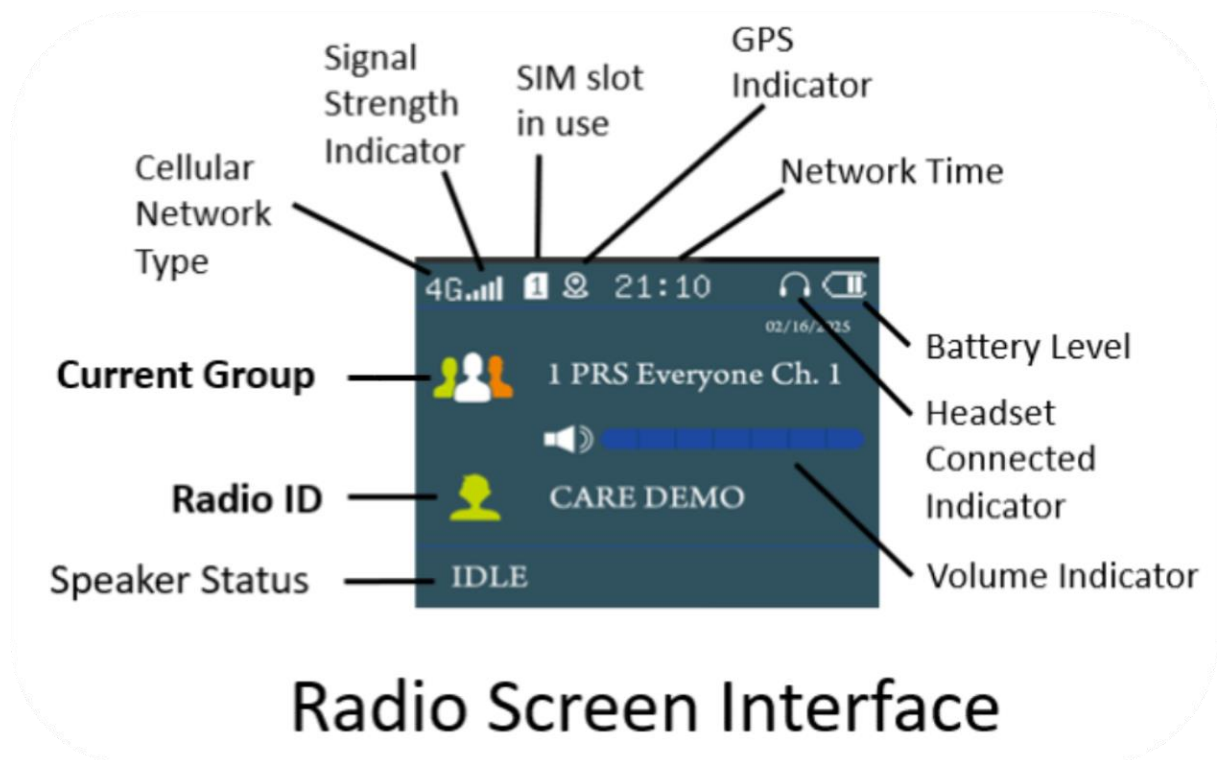

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Functions of the radio.

Let's go over the buttons that will help you get used to your new radio unit.

25 Standard Example Below.



PTT (Push to talk button on microphone). – The large push to talk button is found on hand microphone and is easy to use. Just press and hold for 1 second before you start talking and then hold while transmitting your message and then release when done.

Vol+/Vol- - These buttons control the volume of the radio and are the up and down selectors for any options.

Menu – This button allows you to display and select the available options such as settings, members and groups.

OK – This button acts as the confirm button for entry changes.

OK/SOS - This button when held down for 3 seconds will trigger the SOS activation mode, to end SOS just press the same button again.

Power/Exit. – This button allows you to exit any current menus options and services as the radios off and on button, See Power button for details.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Options menu.

There are 5 options to choose from when pressing the menu button.

1. Group
2. Member
3. GPS (Not available on the 26 Ultra Mini)
4. About (Not available On the 26 Ultra Mini)
5. Settings
6. [Network](#) (Not available On the 25 Mobile Base) (Page 25)

To choose from any of these options use the front arrow buttons and then hit the OK button to enter the desired menu.

1. Group menu.

The following choice allows you to select the desired GROUP channel you want to enter. Use the front arrow buttons and then hit the OK button to enter the desired group.

2. Member menu.

The following choice allows you to select the desired member you want to have a 1 on 1 private conversation with. Use the front arrow buttons and then hit the OK button to select the desired member. Reminder that the members must be online to communicate with.

3. GPS.

The following choice allows you to see your current satellite connectivity status and provides detailed signal information.

4. About.

The following choice allows you to see your radio's current IMEI number and software version.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



5. Settings menu.

The following options will help you customize your radio unit. The number below corresponds with the choice settings.

Available options are:

Display settings.
Volume settings.
Key wakeup settings.
Call in wakeup settings.
Voice play settings.
Power savings settings.
Signal value information.
Double card SIM card settings.
Battery Information.
System Information.
Service Information.
GPS Information.
IMEI QR Code and Information.
Restore factory settings.
APN settings.
Single Call Set.

1. Display Settings:

Available options are:

- Dormancy Settings: This allows you to set the desired radio screen alive time.
- Back Light Settings: This allows you to set the desired screen brightness.
- Language Settings: This allows you to set the desired radio language.
- Time Zone Settings: This allows you to set your current GMT time zone.

2. Volume Settings:

Available options are:

- Volume: This allows you to set the desired loudspeaker volume.
- PTT prompt tone: This allows you to turn on/off the PTT Tone.
- Keypad Tone: This allows you to turn on/off the touch key tones.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



3. Keypad Lock Settings:

This choice allows you to set the radio keypad lock to avoid unwanted touches or radio choice changes. Available settings are: Automatic, Manual and OFF.

Note: Holding down the menu button for 3 seconds will also activate the Keypad Lock feature, hold for 3 more second to release the lock.

4. Key Wakeup Screen Settings:

This choice allows you to wake up the screen display with the touch of any key. Available settings are: ON and OFF.

5. Call in wakeup Settings:

This choice allows you to wake up the screen display with any type of PTT call. Available settings are: ON and OFF.

6. Voice play Settings:

This choice allows you to use the guided voice prompts for every single prompt and action. Available settings are: ON and OFF.

7. Power saving mode Settings:

Adjust the radio's power consumption settings depending on your needs. Available settings are: High efficiency, Power Saving, Superpower Saving.

8. Signal Value Information:

Displays the current radio signal value, if you are having signal issues this menu can help provide the current RSSI signal score. Score range -48~-120 dB is acceptable for radio use.

9. Double SIM card Settings:

This setting allows you to set the priority SIM card slot. I recommended to always leave at Automatic for best performance.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



10. Battery Information:

Displays the current battery state of the radio in score value and the available talk time remaining on the radio unit.

11. Service Information:

Displays the current radio network information:

- Current Group
- My Radio user ID
- Operator for SIM Slot 1
- ICCID for SIM Slot 1
- Operator for SIM Slot 2
- ICCID for SIM Slot 2

12. GPS Information:

Displays the current GPS state of the radio. Feature must be activated by the provider to use this feature.

13. IMEI QR Code Information:

Displays the current radio IMEI number and scannable QR code.

14. Reset Factory Settings:

This setting allows you to reset the radio back to its factory state.

15. APN Settings:

Allows you to choose the APN type. Available options are Station APN, Auto APN, and Manual APN. It is highly recommended that you do not change this section unless you're told by a trained staff member.

16. Single Call Settings:

Allow you to allow or prevent 1 on 1-member direct communication.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Optional Radio features.

In this section we will review the radio choice features that are available for an added cost.

- GPS Radio tracking and SOS Alerts service(s). Available with the purchase of the VIP package, visit <https://talk2me.us/vip>

These services are not available on the 26 Ultra Mini

1. GPS Device tracking.

This feature allows the company dispatcher or mobile application users to the exact location of the radio units assigned with this feature.

- When the 📍 GPS icon is white this will show that the GPS is available but unable to receive a signal from the satellite.
- When the 📍 GPS icon is green this will show that the GPS is receiving a signal from the satellite.

2. SOS Alert features.

This feature allows the company dispatcher or mobile application users to an urgent ALERT from the radio upon activation of the SOS alert.

- On the 25 Standard, this feature is available upon holding the flashlight button down for 3 seconds.
- On the 25 Mobile Base/Professional, this feature is available upon holding the SOS button down for 3 seconds.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Radio functionality tips.

Features and tips:

Poor and no signal issues:

Note: When in a weak signal environment and with poor call quality, you can choose power save mode or normal mode. The call quality will be improved, but the machine also consumes more power.

Automatic screen shutdown:

If there is no button operation within the set time, the radio will automatically shut down the screen.

Transmit prompt sound:

After enabling this function, press and release the PTT key will emit a "beep" prompt sound, which will improve the call experience. When this function is turned off, pressing the PTT key will result in no prompt sound.

Top LED display light:

The top LED will help you to show the current radio status.

Status	LED Indication	Time
Search Network	Green light flashing fast	
Awaiting	Blue/Green light flashing slowly	0.5S on, 3.5S off
Transmitting	Constant Red	
Receiving	Constant Blue	


Using earpiece headset:

Included with every TALK2ME Radio, the earpiece headset provides microphone and headset listening when plugged in.

Battery charge:

It is imperative to always keep your radio unit charged to avoid loss of use.

Select a group (Group call):

Press the green menu button then select the group menu, by pressing the  front selector buttons to browse the available group:

Press the green menu key to confirm entry into the group and you will be added to the group.

Select members to 1 on 1 chat with. (Private radio call)

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Press the menu key and then select the member choice to enter member selection and press

>
the < front selector buttons to browse the available members:

• **Press the green menu key to confirm the choice of the member.**

Now you can press the PTT button, a private call can be made to the member accompanied by a prompt sound and screen display.

Solving guidance for problems:

Phenomena	Solving guidance
Equipment unresponsive	<ul style="list-style-type: none">• Low battery level: The battery may have been depleted, please replace the battery or charge it.• SIM card malfunction: Check or renew/replace the SIM card.• Poor battery contact: Reinstall the battery or clean the battery contact points.
Insufficient standby time	<ul style="list-style-type: none">• Battery performance degradation: replace the battery or buy one more. battery for later use.
Charging fault	<ul style="list-style-type: none">• Battery performance degradation: replace the battery• Poor connection: Check the connect condition or replace the charging cable• Low battery voltage: Charge for about half an hour, then unplug and recharge again• Battery malfunction: replace the battery• Charger malfunction: replace the charger
Unable to connect to the network	<ul style="list-style-type: none">• Signal too weak: Move area and retry <p>Not on server: Confirm that the SIM card has been installed, and the SIM card is in normal use state. Confirm the local telecom operator has a band covering the radio.</p>

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Technical and Environmental

Specifications – 25 Standard Radio

Model	TALK2ME 25 STANDARD RADIO	Battery capacity	4000mAh	SIMCARD	Dual SIM card
Device name	2025 STANDARD POC LTE RADIO	Hotstart	4s	GPS Performance	
Working voltage	DC: 3.4V-4.2V, typical value 3.8V	Coldstart	55s	Frequency	1575.42MHz
Network LTE Bands	2/4/5/7/12/13/14/17/66	Charging Mode	TYPE-C	Capture sensitivity	-143dBm
Maximum transmit Power	FDD-LTE Power Class 3 (23 +/-2dBm)	Antenna	built-in FPC	Update rate	2-4HZ
Standby	100hours	Operating temperature	-20°C~+60°C	Power consumption	35mA
Reception sensitivity	FDD-LTE -94 dBm(20MHZ)	Weight	6.6 oz.	Rated audio power	500mW
Dimensions: 3.66" Tall x 2.29" Width x 1.33" Depth			Platform: XIN POC		

Radio WIRED connectivity Interface(s):

- 1 USB-C port for charging (bottom of radio).
- 1 USB-C port for programming (left side of radio).
- 1 3.5mm Port for external handset/headset/microphone.

Radio WIRELESS connectivity Interface(s):

LTE

Radio antenna connectivity Interface(s):

Built in antenna for both LTE and GPS

Radio mobility connectivity Interface(s):

Dual Nano SIM card slots

Radio software Interface(s):

Talk2Me XIN Radio Platform

Radio Key Features:

Factory unlocked devices can be used with any carrier.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Specifications – 25 Professional Radio

Model	TALK2ME PRO RADIO	Battery capacity	4000mAh	SIMCARD	Dual SIM card
Device name	2025 PRO POC LTE RADIO	Hot start	4s	GPS Performance	
Working voltage	DC: 3.4V-4.2V, typical value 3.8V	Cold start	55s	Frequency	1575.42MHz
Network LTE Bands	2/4/5/7/12/13/14/17/66	Charging Mode	TYPE-C	Capture sensitivity	-143dBm
Maximum transmit Power	FDD-LTE Power Class 3 (23 +/-2dBm)	Antenna	built-in FPC	Update rate	2-4HZ
Standby	100hours	Operating temperature	-20°C~+60°C	Power consumption	35mA
Reception sensitivity	FDD-LTE -94 dBm(20MHZ)	Weight	6.6 oz.	Rated audio power	500mW
Dimensions: 3.66" Tall x 2.29" Width x 1.33" Depth			Platform: XIN POC		

Radio WIRED connectivity Interface(s):

- 1 USB-C port for charging and programming (left side of radio).
- 1 M-Port for external handset/headset/microphone.

Radio WIRELESS connectivity Interface(s):

LTE

Radio antenna connectivity Interface(s):

SMA Removable Antenna for LTE and Internal GPS Antenna

Radio mobility connectivity Interface(s):

Dual Nano SIM card slots

Radio software Interface(s):

Talk2Me XIN Radio Platform

Radio Key Features:

Factory unlocked devices can be used with any carrier.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Specifications – 25 Mobile Base Radio

Technical specification			
Model		25 Mobile Base Radio	
Operating voltage		DC: 12V / 2A	
Network standard		LTE	
Frequency / LTE Bands		CAT1 GLOBAL (module:M12C-NA) B1/ B2/B3/B4/B5/B7/B8/B12/B13/B17/B66	
Maximum transmitting power		TDD-LTE Power Class 1（23 +/-2dBm） FDD-LTE Power Class 1（23 +/-2dBm）	
Receiving sensitivity		TDD-LTE -94 dBm(10MHZ) FDD-LTE -94 dBm(10MHZ)	
Rated audio power		1000mW	
Power supply mode		DC12V/ Vehicle 12V (cigarette lighter)	
Antenna		External SMA antenna for LTE & GPS	
Operating temperature		-20℃ ~ +50℃	
Weight		186g	
Size: Length x Width x thickness (mm)		166*61*35（without antenna）	
SIM card		Nano size dual SIM card	
GPS Information			
Frequency	1575.42MHz	Tracking sensitivity	-155dBm
Acquisition sensitivity	-143dBm	First positioning time (outdoor)	Warm start: 4s
			Cold start: 55s
Update rate	2-4HZ	Antenna	Active antenna
Power dissipation	35mA	View	Local latitude and longitude display and platform scheduling software

Radio WIRED connectivity Interface(s):

- 1 USB-C port for programming (back side of radio).
- 1 E-Port for external handset microphone (Included).

Radio WIRELESS connectivity Interface(s):

LTE

Radio software Interface(s):

Talk2Me XIN Radio Platform

Radio Key Features:

Factory unlocked devices can be used with any carrier.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Specifications – 26 Ultra Mini Radio

Technical specification	
Model	26 Ultra Mini PoC Radio
Operating voltage	DC: 3.4V-4.2V, Typical value:3.8V
Network standard	LTE
Frequency / LTE Bands	CAT1 GLOBAL (module:M12C-NA) B1/ B2/B3/B4/B5/B7/B8/B12/B13/B17/B66
Maximum transmitting power	TDD-LTE Power Class 1 (23 +/-2dBm) FDD-LTE Power Class 1 (23 +/-2dBm)
Receiving sensitivity	TDD-LTE -94 dBm(10MHZ) FDD-LTE -94 dBm(10MHZ)
Rated audio power	500mW
Battery	2000 mAh
Antenna	Built-in FPC antenna
Operating temperature	-20°C ~ +50°C
Weight	130g
Size: Length x Width x thickness (mm)	89mm*53mm*29mm (without antenna)
SIM card	Nano size dual SIM card

This model does not offer GPS or SOS features.

Radio WIRED connectivity Interface(s):

- 1 USB-C port for programming (side of radio).
- 1 USB-C Port for external earpiece microphone (Included).

Radio WIRELESS connectivity Interface(s):

LTE

Radio software Interface(s):

Talk2Me XIN Radio Platform

Radio Key Features:

Factory unlocked devices can be used with any carrier.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Support

Thank you for buying this talk2me product. You can visit www.talk2me.us support to obtain more information about your product, get help, access the latest downloads and manuals.

Compliance

For regulatory compliance information, visit <https://talk2me.us>

See the regulatory compliance document before connecting the power supply.

Trademarks

© talk2me®, talk2chat® and the talk2me® logo are trademarks of talk2me Social, Inc., Any non-talk2me trademarks are used for reference purposes only.

Warranty

talk2me **PRODUCT LIMITED WARRANTY TERMS AND CONDITIONS**

This talk2me® branded product, as supplied and distributed by talk2me and delivered in new condition, and is protected by talk2me® against manufacturing defects in materials and workmanship for a limited warranty period of:

- 1) 1 year from the date of purchase.

talk2me Social Inc.
847 S Randall Road
Ste 400
Elgin, IL 60123
USA

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



FCC Declaration of Conformance

This device follows part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to use the equipment.

This equipment has been evaluated and found to follow the limits for a Class B digital device, following part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference in radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be found by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or move the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Operations in the 5.850-5.895GHz band are restricted to indoor usage only.

FCC RF Radiation Exposure Statement (SAR)

This Transmitter must not be co-located or working in conjunction with any other antenna or transmitter.

This equipment follows FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and used at a minimum distance of 35 centimeters between the radiator and your body.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Safety Warnings

Do not use any other power adapter except the one that goes with this unit, or a power adapter shown in the list below.

Use of another adapter could result in damage to the unit.

The following power adapter is qualified for use with this talk2me® radio: (specified the adapter specifications, brand, make, type and other restrictions)

Caution

Ensure to connect the power cord of power adapter to a socket-outlet with grounding connection.

Safety and Compliance

Read before Use

We recommend you read the following sections thoroughly before use. talk2me Social Inc. is not liable for malfunctions or damage resulting from misuse of the modem.

Safety Precaution

Please see the following safety precautions.

Use the chargers, cables or accessories approved by the device manufacturer.

Do NOT disassemble or change the device. Doing so voids the warranty.

Prevent wetness from penetrating internal parts. Using the device in wet or damp environment (for instance, charging it in a wet environment like bathtub or bathroom) may result in malfunctions.

Do NOT use this device near source of heat or fire, such as oven, microwave, stove, or heater.

Keep your device away from cooking appliances.

Do NOT place the device in places with heated atmosphere (dryer, sauna, hot water).

Do NOT use the device and disconnect all cables at places with fire or explosion risks.

Avoid strong physical impact (heavy objects or excessive force).

Keep your device away from liquid or conductive materials.

Do NOT charge the device when either the device, the adapter, or the cable are wet. It may cause short-circuit.

Power off the device when near medical equipment or high-precision control systems to avoid potential interference.

Charge with specified voltage only.

Place the device on a flat, stable surface for best use.

Keep the device and adapter away from children and pets.

The device must be disposed of following the locally applicable. environmental regulations.

Keep the device away from magnetic items such as magnetic strip cards or items that generate strong electronic or magnetic fields, such as a microwave.

Do NOT store the device in an overheated environment.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Do NOT use the device when it is overheated.

Disconnect all the cable connections when the device is not in use.

Place the device in places with good signal strength.

Make sure the adapter you use with the device meets the approved PROs and specifications.

Disposal and Recycling

Do not dispose of the router in a household garbage bin.

Products with this label must be taken to specific collection points at the end of their life.

You can learn more about how to recycle your mobile device by visiting the CTIA website at

www.ctia.org/news/how-to-recycle-your-mobile-device

Maintenance & Care

Avoid extreme temperatures or direct sunlight.

Clean handset with soft, dry cloth. Do NOT use alcohol solvent (color may fade)

The warranty does not cover malfunctions caused by misuse.

Stop all the applications and shut down the device before cleaning it.

Keep the device and its accessories always dry.

If anomaly occurs, contact your providers support at once.

When storing the device, do NOT store it in a container with dampness or under extended heat.

Avoid always dropping the device or strong physical impact.

Legal Notices

Copyright Statements

Copyright ©2025 talk2me Social Inc. All rights reserved.

No part of this document may be duplicated, reproduced, shared, or used in any form, regardless written or electronically, without the prior written consent of **talk2me Social Inc.** and its affiliates. The product described in this document has software developed by **talk2me Social Inc.** and licensed third parties. Unless instructed or licensed otherwise by **talk2me Social Inc.** or other affiliated entities, you must NOT (1) modify, amend, translate, reverse-engineer or derive this product; (2) reproduce the software or any part of this; (3) rent, lease, transfer or re-license the software or any part of this, or transfer the rights of the software; (4) remove any statement or labeling information of the product and the software in this product; (5) tamper, change or replace the software, or any attempt to impact the integrity of the software. If any of the violations above occur, your license in using the software will be ended.

Trademark Statements

talk2me Social® is a trademark of **talk2me Social Inc.**, the product names in this site, and the other

TALK2ME PoC Radios

Universal GLOBAL Radio Manual





trademarks, logos, and service marks (collectively the "Trademarks") used in this site are the property of **talk2me Social Inc.** or their respective owners. Nothing contained in this site should be construed as granted by implication, estoppel, or otherwise, a license or right of use of **talk2me Social** or any other Trademark displayed in the site without the prior written permission of **talk2me Social**. or its respective owner.

Changes

The functions of the product and associated peripherals or accessories are described in this document are based on the current hardware, software and/or local network conditions at the time of writing and thus may vary due to conditions set by local network service providers or carriers. Therefore, all information described here is subject to change without prior notice.

Replacement Parts List.

Part Image	Description
	Removable Belt Clip
	Removable Battery
	USB A to USB C Power Cable for talk2me Radios

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



	USB A Power Block for talk2me Radios
	Replacement Headpiece
	Replacement of Basic USA Sim card
	Replacement TALK2ME GLOBAL Sim card
	Replacement Housing unit for Radios
	USB Docking Station for Radios


If you need a part that is not listed, please contact us.

TALK2ME PoC Radios

Universal GLOBAL Radio Manual



Network option.

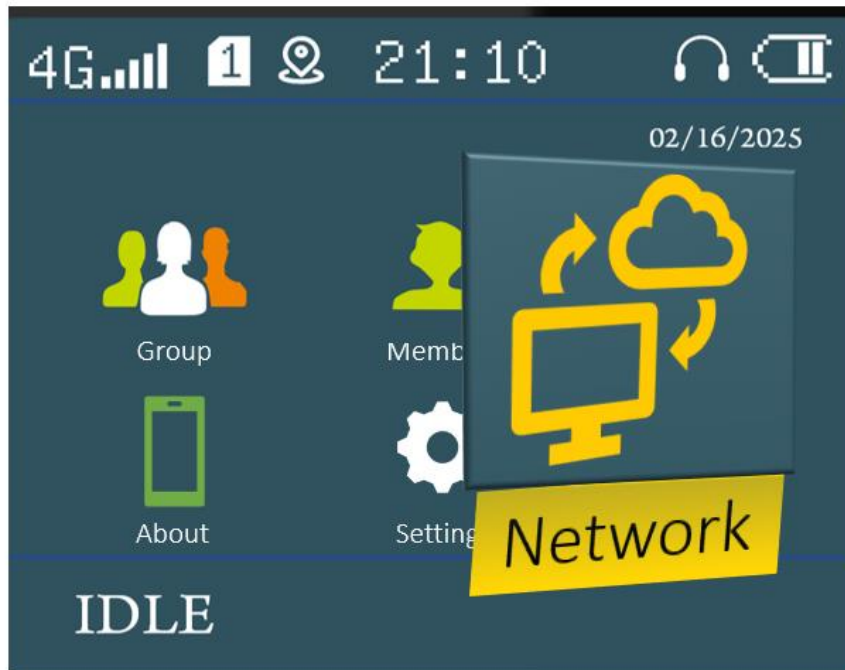

1. Choose the menu button on the front of your radio.
2. Then choose the network option on your screen (See example above)
3. Then with the arrows highlight the network option you want:

IMEI: XXXXXXXXXXXXX – This is normally your Private Network.

PUBLIC: XXXXXXXXXXXXX – This is normally your Public Access Network.

Additional options may be available depending on your radio model and vendor.

4. Then hit the green button to confirm your selection
5. A checkmark will appear on the right side of your selection, and your radio will go to the network
6. Press the RED exit button to return to the main screen.